



\*SHOWN WITH OPTIONAL  
CYLINDER & COLLARS

- Certifications**
- Conforms to ANSI/BHMA A156.5, Grade 1
  - cULus listed, 3hr fire-rating
  - 5 Year limited warranty

**Door Thickness** • 1 3/8" (35 mm) minimum

**Handing** • Non-handed

**Backset** • 2 3/4" (70 mm)

**Deadbolt** • Solid bolt  
• 1" (25.4 mm) throw

**Faceplate** • 1 1/4 x 4 5/8" (28.6 x 117.5 mm)  
• Square corners

**Strike** • 1 1/8 x 3 1/2" (28.6 x 88.6 mm)  
• Square corners

**Trim** • Cylinder collar and thumbturn available  
• Round or square styles available

*Sold separately, please contact for details*

**Chassis** • Functions 60 or 64: concealed mounting  
*All other functions: exposed mounting*

**Cylinder** • Conventional and high security mortise cylinders available  
• Small format interchangeable core (SFIC) mortise housing available (less core)  
*Sold separately, please contact for details*


**Functions** 51 Single cylinder with thumbturn  
55 Thumbturn only  
60 Double cylinder<sup>1</sup>  
64 Cylinder only<sup>1</sup>  
*(1) For use in rooms with more than one exit*

**Finish** 15-Satin nickel, 26D-Satin chrome  
*Other finishes available by special order*

DMDB	51	SQ	-	26D
SERIES	FUNCTION	TRIM <sup>1</sup>		FINISH

(1) OPTIONS: S-ROUND SQ-SQUARE NOTE: DMDB LOCKS ARE ASSEMBLED TO ORDER, PLEASE CONTACT FOR DETAILS

## DIMENSIONS

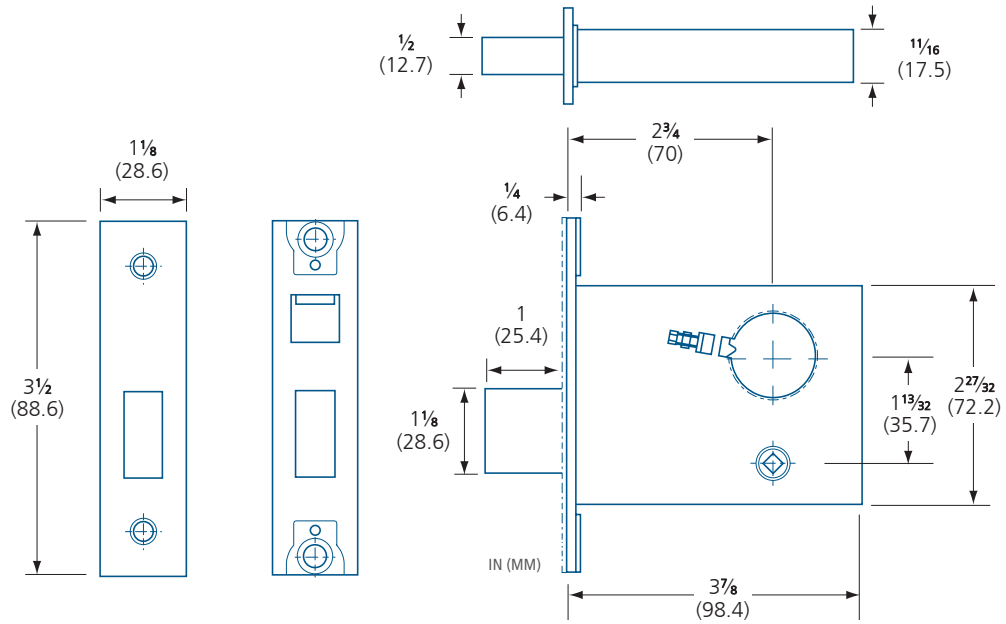

## PARTS & ACCESSORIES



**DMDB-PS26D**  
Deadbolt strike, square corners  
1 1/4 x 3 1/2" (28.6 x 88.6 mm)



**DM45X-PR**  
Mortise cylinder collar with spring; round.  
ø 1 1/16 x 3 7/8" (43 x 9 mm)



**DM45X-PRS**  
Mortise cylinder collar with spring; square.  
1 7/8 x 1 7/8 x 3 7/8" (48 x 48 x 9 mm)



**DM00X-PSCYL**

- 1 1/8" (28.6 mm) 5-pin (drilled 6) brass mortise cylinder; Schlage "C" with 2 keys
- For installations on 1 3/4" (45 mm) thick doors
- Includes DM00X-PCAM



**DM00X-PCAM**  
Replacement mortise cylinder cam, with screws



**DM45X-PT**  
Mortise lock thumbturn; round.



**DM45X-PTS**  
Mortise lock thumbturn; square.



**DM00X-PPRVI**  
Privacy indicator kit, round. Includes replacement interior/exterior trims for use with function 55. 1 3/4" (44.5 mm) door thickness only.



**DM00X-PPRVIQ**  
Privacy indicator kit, square. Includes replacement interior/exterior trims for use with function 55. 1 3/4" (44.5 mm) door thickness only.



**DM00X-PPRVI-ECYL**  
Privacy indicator kit, round. Includes replacement interior/exterior trims for use with function 51. 1 3/4" (44.5 mm) door thickness only. Includes DM00X-PECYL cylinder and 2 keys.



**DM00X-PPRVIQ-ECYL**  
Privacy indicator kit, square. Includes replacement interior/exterior trims for use with function 51. 1 3/4" (44.5 mm) door thickness only. Includes DM00X-PECYL cylinder and 2 keys

