

- Certifications**
- Conforms to ANSI/BHMA A156.5, Grade 1
 - cULus listed, 3hr fire-rating
 - 5 Year limited warranty
- Door Thickness**
- 1 $\frac{3}{8}$ –2" (35–51 mm)
- Handing**
- Non handed
- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{3}{8}$ " (60 mm) – available
- Spring Latch**
- Solid brass deadlatch
 - $\frac{5}{8}$ " (15.9mm) throw
- Faceplate**
- Mortise type, square corners
 - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (29x57 mm)
 - Self-adjustable for bevelled doors
- Strikes**
- T-type strike, 1 $\frac{1}{8}$ x2 $\frac{3}{4}$ " (29x70 mm)
 - Wood frame security plate with 3" (76 mm) wood screws
 - Plastic dust-box


- Chassis**
- Die-cast trim ring with protective shield
 - Free-spinning solid brass cylinder collar
 - High-strength steel cylinder housing
 - Through bolt mounted
 - Exposed mounting screws
- Preparation**
- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
 - Edge bore: 1" (25.4 mm)
- Cylinder**
- Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*
- Other keyways and keying options available, including CX5 high security. (*) Special order.*
- Functions** 51 Single cylinder, thumb-turn
- Finish** 26D–Satin chrome
- Other finishes available by special order*

DG1	AN	51	–	26D
SERIES		FUNCTION		FINISH

SELECTION GUIDE

SERIES	FUNCTION ¹	FINISH ¹	/CASE
DG1	51 Single cylinder, thumb-turn	26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED
 • KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

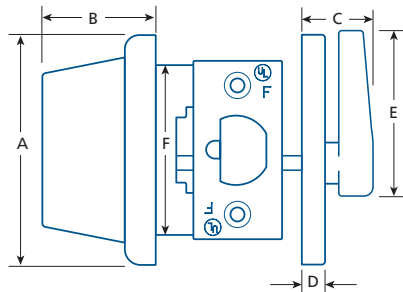

	A	B	C	D	E	F
DG1	2 ⁵ / ₈ (67)	1 ⁹ / ₃₂ (32.5)	1 ⁵ / ₁₆ (24)	9/ ₃₂ (7)	1 ³ / ₄ (44.5)	2 (51)

IN (MM)

PARTS & ACCESSORIES



DGPL238

Deadlatch: 2³/₈" (60 mm) backset,
 1¹/₈ x 2¹/₄" (28.5 x 57 mm) faceplate

