



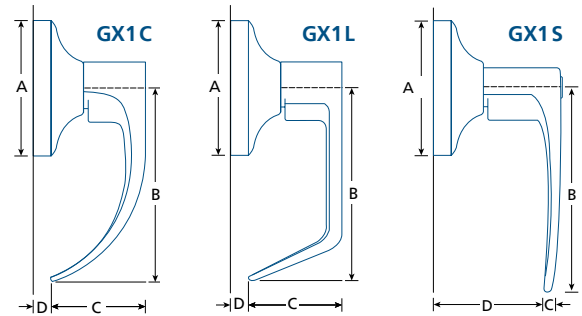
- Type** • Cylindrical lock
- Certifications**
- Certified ANSI/BHMA A156.2, Series 4000, Grade 1
  - cULus listed, 3hr fire-rating
  - UL 10C Positive Pressure Rating
  - Meets ADA requirements
  - 10 Year limited warranty
- Door Thickness**
- 1 $\frac{3}{8}$ –2" (35–51mm)
  - SFIC Models: 1 $\frac{9}{16}$ –2" (40–51mm)
- Handing** • Non handed
- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
  - 2 $\frac{3}{8}$ " (60 mm) – available
  - 3 $\frac{3}{4}$ " (95 mm) – available
  - 5" (127 mm) – available
- Spring Latch**
- Stainless steel,  $\frac{1}{2}$ " (12.7 mm) throw
  - Deadlatch,  $\frac{3}{4}$ " (19 mm) throw – available
- Faceplate**
- Mortise type, square corners
  - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm)
- Strike** • ASA Strike
- Trim**
- Solid, pressure cast lever
  - Brass rose
  - Rose diameter: 3 $\frac{9}{16}$ " (90 mm)
- Chassis**
- Concealed mounting plate and screws
  - Fixed security posts
  - Lever clutch release
- Preparation**
- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
  - Edge bore: 1" (25.4 mm)
- Cylinder**
- Solid brass, 6-pin
  - Schlage "C" keyway, 2 keys
  - Removable, rekeyable
  - Small format interchangeable core (SFIC) model – available\*
- Other keyways and keying options available, including CX5 high security. (\*) BEST® and CX5® cores sold separately.*
- Functions**
- |    |               |    |                    |
|----|---------------|----|--------------------|
| 10 | Passage       | 60 | Store              |
| 15 | Exit          | 70 | Classroom          |
| 17 | Dummy, single | 75 | Classroom security |
| 42 | Privacy       | 80 | Storeroom          |
| 53 | Entry         | 82 | Institution        |
- Lever Styles** C–Curved return, L–Standard return, S–Straight; no return
- Finish** C19–Matte black, C26D–Satin chrome
- Other finishes available by special order*




GX1	L	53	C26D
SERIES	STYLE	FUNCTION	FINISH

## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
GX1	C, L, S	10 Passage	C26D, C19 <sup>2</sup>	6
GX1	L	15 Exit	C26D	6
GX1	L	17 Dummy, single	C26D, C19 <sup>2</sup>	6
GX1	C, L, S	42 Privacy	C26D, C19 <sup>2</sup>	6
GX1	C, L, S	53 Entry ➡	C26D, C19 <sup>2</sup>	6
GX1	C, L, S	53IC Entry SFIC* ➡	C26D, C19 <sup>2</sup>	6
GX1	L	60IC Store SFIC* ➡	C26D	6
GX1	C, L, S	70 Classroom ➡	C26D, C19 <sup>2</sup>	6
GX1	C, L, S	70IC Classroom SFIC* ➡	C26D, C19 <sup>2</sup>	6
GX1	L	75 Classroom security ➡	C26D	6
GX1	L	75IC Classroom security SFIC* ➡	C26D	6
GX1	C, L, S	80 Storeroom ➡	C26D, C19 <sup>2</sup>	6
GX1	C, L, S	80IC Storeroom SFIC* ➡	C26D, C19 <sup>2</sup>	6
GX1	L	82 Institution ➡	C26D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED. (2) GX1L ONLY (\*) ALL SFIC MODELS ARE LESS CORE  
➡ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.



	A	B	C	D*
<b>GX1C</b> 	3 <sup>9</sup> / <sub>16</sub> (90)	5 (127)	2 <sup>1</sup> / <sub>2</sub> (63.3)	3 <sup>3</sup> / <sub>8</sub> (10)
<b>GX1L</b> 	3 <sup>9</sup> / <sub>16</sub> (90)	5 (127)	2 <sup>5</sup> / <sub>8</sub> (66.7)	3 <sup>3</sup> / <sub>8</sub> (10)
<b>GX1S</b> 	3 <sup>9</sup> / <sub>16</sub> (90)	5 (127)	7 <sup>7</sup> / <sub>8</sub> (22)	2 <sup>7</sup> / <sub>16</sub> (62)

IN (MM)

(\*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



### 9106

T-Strike, square corners:  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (28.5 x 70 mm)

### 9106NH

T-Strike, no hole; square corners:  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (28.5 x 70 mm)



### ASA-T

ASA strike with adjustable tab

### ASANH

ASA strike, no hole



### 9807

CX5 high security SFIC core, 7 pin, 0 bitted

### CBI-BF6KD-26D

BEST® F type SFIC core, 6 pin, keyed different

### CBI-BF7KD-26D

BEST® F type SFIC core, 7 pin, keyed different



### GX1SL238

Passage latch: 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm) faceplate

### GX1SL234

Passage latch: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm) faceplate

### GX1PL238

Privacy latch: 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm) faceplate

### GX1PL234

Privacy latch: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm) faceplate



### GX1DL238

Deadlatch: 2<sup>3</sup>/<sub>8</sub>" (60) backset,  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm) faceplate

### GX1DL234

Deadlatch: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm) faceplate



### GX1DL234-34

Deadlatch: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset, 3<sup>4</sup>/<sub>4</sub>" (19 mm) throw, 1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm) faceplate  
*For use in double door or electric strike applications*



### GX1LE334

Backset extension to 3<sup>3</sup>/<sub>4</sub>" (95 mm); use with 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset latch

### GX1LE500

Backset extension to 5" (127 mm); use with 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset latch

