

## Entry Handlesets

- Reliable, quality modern entry handlesets for residential homes
- Concealed mounting screws
- Includes Linea interior lever and matching round or square thumbturn
- Interior lever can be swapped with any other Tecnica Design lever<sup>1</sup>
- Available with round or square interior trim

(1) Availability may vary, please contact your local Dorex representative.

- Conforms to ANSI/BHMA Grade 3
- 25-year mechanical warranty
- 5-year limited finish warranty
- Non-handed, zinc die-cast exterior trim
- For doors 1¾–2¼" (44.5–57 mm) thick
- Fits standard 2⅞" (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel tubular spring latch with adjustable 2⅞–2¾" (60–70 mm) backset.
- Steel 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable 2⅞–2¾" (60–70 mm) backset
- Mortised faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism
- Weiser 5-pin brass cylinder in steel housing with 2 keys
- Full-lip strike and deadbolt strike for wood door frames included

### AVAILABLE FUNCTIONS

**T401** Entry  
(single cylinder w/ thumbturn)




## SELECTION GUIDE

T401	PT	LTS	15	KD	W
SERIES	STYLE <sup>1</sup>	TRIM <sup>2</sup>	FINISH	KEYING	LATCH

(1) AR: ARCO; DT: DELTA; PT: PLATO (2) LTS: LINEA-SQUARE; LTR: LINEA-ROUND

		10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	C5 ANTIQUE BRASS	V3* POLISHED BRASS	/CASE
ARCO	AR			■		■	■	■						6
DELTA	DT			■		■		■						6
PLATO	PT			■		■	■	■						6

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\*) LIFETIME FINISH WARRANTY

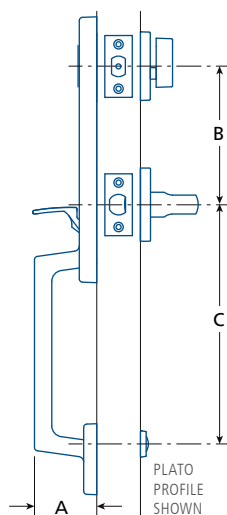

	A	B	C
ARCO AR	2 <sup>11</sup> / <sub>16</sub> (68)	5 <sup>1</sup> (127)	8 <sup>3</sup> / <sub>4</sub> – 10 <sup>3</sup> / <sub>8</sub> <sup>2</sup> (222 – 264)
DELTA DT	2 <sup>1</sup> / <sub>8</sub> (54)	5 <sup>1</sup> (127)	8 <sup>13</sup> / <sub>32</sub> (214)
PLATO PT	2 <sup>11</sup> / <sub>16</sub> (68)	5 <sup>1</sup> / <sub>2</sub> (140)	8 <sup>3</sup> / <sub>4</sub> – 10 <sup>3</sup> / <sub>8</sub> <sup>2</sup> (222 – 264)

IN (MM) (1) RECOMMENDED DISTANCE (2) ADJUSTABLE

