



LHR MODEL
SHOWN



- Certifications**
- Certified ANSI/BHMA A156.3, Grade 1
 - cULus listed, up to 3hr Fire Exit¹
 - 10 Year limited warranty
- (1) Panic Hardware model available by special order

- Rail Assembly**
- Stainless steel rail assembly
 - Field sizable

- Handing**
- Handed, field reversible

- Door Width**
- 30–38" (762–965 mm)
 - 36–48" (914–1219 mm) – option

- Door Thickness**
- 1 3/4" (45 mm)

- Stile Width**
- 5 1/2" (140 mm) minimum
- Measured from door edge

- Projection**
- 2 9/16" (65 mm) from door surface

- Lock Case**
- Fits ANSI/BHMA A115.1 door preparation
 - Adjustable faceplate for bevelled doors up to 1/8" over 2" (3 mm over 51 mm)
 - Field reversible handing
 - Steel construction

- Latchbolt**
- 2 piece, anti-friction stainless steel latchbolt with deadlatch
 - 3/4" (19 mm) throw

- Strike**
- ANSI strike
 - Stainless steel

- Dogging**
- —

- Hardware**
- Machine and wood screws

- Electrical Options**
- Electric latch retraction – option
 - Alarm kit – available*
 - Request to exit kit – available*

(*) Sold separately, see 9500 Trims & Accessories

- Functions**
- 10 Passage
 - 70 Classroom
 - 80 Storeroom

Escutcheon lever trim & mortise cylinder required, not included – sold separately, see 9500TEMU

- Trims**
- Escutcheon trim (matching function) – required
- Sold separately, see 9500TEMU

- Finish**
- 32D–Satin Stainless Steel
- Other finishes available by special order

9500FMU	70	R3	LHR	–	32D
MODEL	FUNCTION	SIZE ¹	HAND ²		FINISH


(1) SEE SELECTION GUIDE (2) LHR–LEFT HAND REVERSED, RHR–RIGHT HAND REVERSED



SELECTION GUIDE

MODEL		FUNCTION	SIZE	DOOR WIDTH¹	DOGGING	FINISH	/CASE
9500FMU	Fire Exit Hardware² Mortise Rim	10 Passage	R3	30–38 (762–965)	—	32D	4
		70 Classroom ➡					
		80 Storeroom ➡	R4*	36–48 (914–1219)	—	32D	4

(1) RECOMMENDED DOOR WIDTH, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT. (2) FIRE EXIT HARDWARE MUST BE INSTALLED ON FIRE LABELLED DOORS.
(*) SPECIAL ORDER—PLEASE CONTACT.

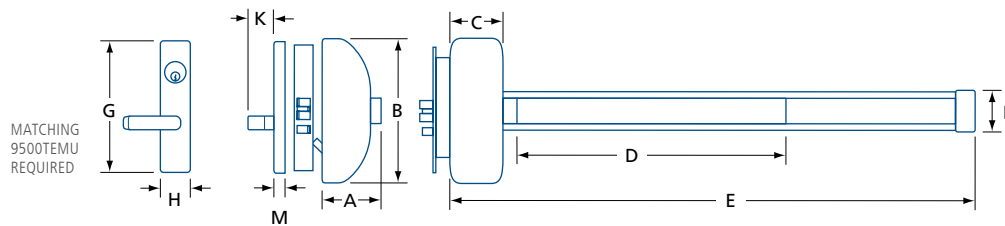

MODEL	A	B	C	D	E ¹	F	G	H	K	M
9500FMU R3	2 9/16 (65)	8 11/16 (220)	2 5/8 (67)	21 1/4 (540)	32 11/16 (830)	2 3/8 (59)	8 1/2 (216)	2 (50.8)	2 1/8 (54)	1/2 (12.7)
9500FMU R4				27 1/2 (698)	44 11/16 (1135)					

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

9500TEMU ESCUTCHEON TRIM



Trim	9500TEMU 10	9500TEMU 70	9500TEMU 80
Exit Device	9500FMU 10	9500FMU 70	9500FMU 80
Function	Passage	Classroom ➡	Storeroom ➡
Finish	26D	26D	26D
Lever	Straight return	Straight return	Straight return
Cylinder	—	Not included ¹	Not included ¹
Escutcheon (HxW)	8 1/2 x 2 (216 x 50.8)	8 1/2 x 2 (216 x 50.8)	8 1/2 x 2 (216 x 50.8)
Lever (B)	4 9/16 (116)	4 9/16 (116)	4 9/16 (116)
Projection (C)	2 5/8 (67)	2 5/8 (67)	2 5/8 (67)
Door Thickness	1 3/4 (44.5)	1 3/4 (44.5)	1 3/4 (44.5)
Warranty	1 Year limited	1 Year limited	1 Year limited

IN (MM) (1) REQUIRES 1-3/8IN (35MM) MORTISE CYLINDER WITH FALCON-TYPE CAM, ORDER #MC138-SCKD, FOR CMK ORDER #MC138-SCKD6CMK.

PARTS & COMPONENTS

See 9500 Trims & Accessories for additional items.

