

- Standard weight, full mortise
- 5 knuckles, 2 ball bearings
- Steel with steel pin
- Conforms to ANSI/BHMA A156.1
- ANSI/BHMA A156.7 template hole pattern

OPTIONS

- NRP: Non-removable pin
- A: NRP, radius corners: 1/4" (6.4 mm)*
- B: NRP, radius corners: 5/32" (4 mm)*

(*) Radius corners are only available for size 454 (4x4 1/2 in) hinges.

- Non-handed
- Flat tips with knock-out bottom
- Wood and undercut machine screws included


BB1079 - 454 - * - 26D - NRP

MODEL	SIZE	CORNER	FINISH	OPTION

(*) LEAVE BLANK FOR SQUARE CORNERS.

SIZE	INCHES	MM	GAUGE	HOLES	SCREWS INCLUDED		QTY ¹
					MACHINE	WOOD	
3535*	3 1/2 x 3 1/2	88.9 x 88.9	0.123	6	#10-24 x 1/2	#9 x 1	3/60
44*	4 x 4	101.6 x 101.6	0.130	8	#12-24 x 1/2	#12 x 1 1/4	3/60
454*	4 1/2 x 4	114.3 x 101.6	0.134	8	#12-24 x 1/2	#12 x 1 1/4	3/60
4545*	4 1/2 x 4 1/2	114.3 x 114.3	0.134	8	#12-24 x 1/2	#12 x 1 1/4	3/60
545*	5 x 4 1/2	127 x 114.3	0.146	8	#12-24 x 1/2	#12 x 1 1/4	3/30
55*	5 x 5	127.0 x 127.0	0.146	8	#12-24 x 1/2	#12 x 1 1/4	3/36

(1) 3/60: QUANTITY PER BOX / QUANTITY PER CASE. HINGES NOT SOLD INDIVIDUALLY. (*) FIRE RATING AS PER NFPA80 GUIDELINES.

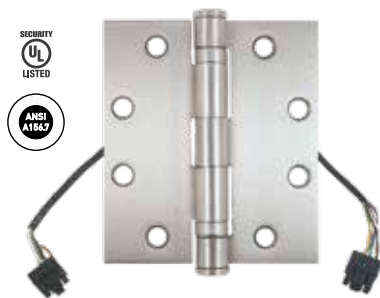

4-WIRE (28 AWG)
JC-603QC-BB1079-454-26D-ETW04



8-WIRE (28 AWG)
JC-603QC-BB1079-454-26D-ETW08

For more information, see page 04.620

1D	15	2G	26	26D	32D ¹	BLR	P
MATTE BLACK LACQUER	SATIN NICKEL	ZINC PLATED	POLISHED CHROME	SATIN CHROME	SATIN STAINLESS STEEL	DARK BRONZE	PRIME COATED

OTHER SIZES AND FINISHES AVAILABLE BY SPECIAL ORDER, PLEASE CONTACT FOR DETAILS.

(1) AVAILABLE ONLY FOR 454 AND 55 SIZES WITH NRP.

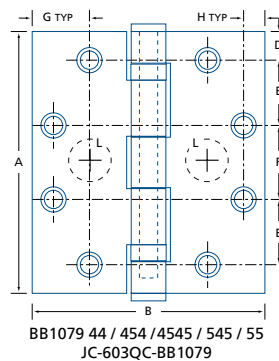

MODEL	A	B	C	D	E	F	G	H	K	L*
BB1079 3535	3 1/2 (88.9)	3 1/2 (88.9)	1/2 (12.7)	23/64 (9.1)	1 25/64 (35.4)	—	1 1/16 (17.5)	23/64 (9.1)	1/16 (1.6)	—
BB1079 44	4 (101.6)	4 (101.6)	9/16 (14)	1/2 (12.7)	1 (25.5)	31/32 (24.6)	3/4 (19.1)	3/8 (9.5)	1/16 (1.6)	—
BB1079 454 JC-603QC	4 1/2 (114.3)	4 (101.6)	19/32 (15.2)	1/2 (12.7)	1 1/8 (28.6)	1 15/64 (31)	1 (25.4)	3/8 (9.5)	1/16 (1.6)	19/32 Ø (15)
BB1079 4545	4 1/2 (114.3)	4 1/2 (114.3)	19/32 (15.2)	1/2 (12.7)	1 1/8 (28.6)	1 15/64 (31)	1 (25.4)	3/8 (9.5)	1/16 (1.6)	—
BB1079 545	5 (127.0)	4 1/2 (114.3)	5/8 (15.9)	1/2 (12.7)	1 1/4 (31.8)	1 31/64 (37.7)	1 (25.4)	3/8 (9.5)	1/16 (1.8)	—
BB1079 55	5 (127)	5 (127)	5/8 (15.9)	1/2 (12.7)	1 1/4 (31.8)	1 31/64 (37.7)	1 (25.4)	3/8 (9.5)	1/16 (1.6)	—

DIMENSIONS IN INCHES (MILLIMETRES) AS PER ANSI A156.7

*DIMENSION OF THE NODE, NOT THE FRAME PREPARATION.