



BHMA
CERTIFIED

G2

UL
LISTED
C US

3H

ADA

10
YEAR

- Type** • Cylindrical lock
- Certifications** • Certified ANSI/BHMA A156.2, Series 4000, Grade 2
• cULus listed, 3hr fire-rating
• UL 10C Positive Pressure Rating
• Meets ADA requirements
• 10 Year limited warranty
- Door Thickness** • 1³/₈ – 1³/₄" (35 – 44.5 mm)
- Handing** • Non handed
- Backset** • 2³/₄" (70 mm)
• 2³/₈" (60 mm) – available
• 3³/₄" (95 mm) – available
• 5" (127 mm) – available
- Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw
- Faceplate** • Mortise type, square corners
• 1¹/₈ x 2¹/₄" (28.5 x 57 mm)
- Strike** • ASA Strike
- Trim** • Solid, pressure cast lever
• Brass rose
• Rose diameter: 3⁵/₁₆" (84.5 mm)
- Chassis** • Concealed mounting plate and screws
• Removable security posts
• Lever clutch release – option
- Preparation** • Cross bore: 2¹/₈" (54 mm)
• Edge bore: 1" (25.4 mm)
- Cylinder** • Solid brass, 6-pin
• Schlage "C" keyway, 2 keys
• Removable, rekeyable
Other keyways and keying options available, including CX5 high security
- | | | |
|------------------|------------------|----------------|
| Functions | 10 Passage | 53 Entry* |
| | 15 Exit | 60 Store |
| | 17 Dummy, single | 70 Classroom |
| | 42 Privacy | 80 Storeroom* |
| | 51 Office | 82 Institution |
- (* Lever clutch release available (-0))
- Lever Styles** C–Curved return
- Finish** C26D–Satin chrome, C3–Polished brass
Other finishes available by special order

F	C	53	C26D	-O
SERIES	STYLE	FUNCTION	FINISH	OPTION ¹


(1) OPTIONS: 238 2-3/8IN (60MM) BACKSET -O LEVER CLUTCH RELEASE (53 & 80 ONLY)

SELECTION GUIDE

SERIES	STYLE	FUNCTION ¹	FINISH ¹	/ CASE
F	C	10 Passage	C26D, C3	12
F	C	15 Exit	C26D	12
F	C	17 Dummy, single	C26D, C3	40
F	C	42 Privacy	C26D, C3	12
F	C	51 Office ↔	C26D	12
F	C	53 Entry ↔	C26D, C3	12
F	C	53-O Entry, with clutch release ↔	C26D	12
F	C	60 Store ↔	C26D	12
F	C	70 Classroom ↔	C26D, C3	12
F	C	80 Storeroom ↔	C26D, C3	12
F	C	80-O Storeroom, with clutch release ↔	C26D	12
F	C	82 Institution / utility ↔	C26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

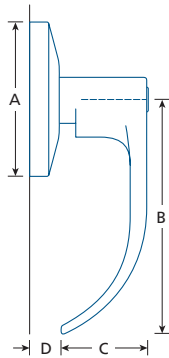

		A	B	C	D*
FC	Ⓢ	3 5/16 (84.5)	4 1/2 (114)	1 7/8 (48)	1/2 (12.7)

IN (MM) (*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106

T-Strike, adjustable tab; square corners:
1 1/8 x 2 3/4" (28.5 x 70 mm)

9106NH

T-Strike, no hole; square corners:
1 1/8 x 2 3/4" (28.5 x 70 mm)



ASA-T

ASA strike with adjustable tab

ASANH

ASA strike, no hole



TL013

Backset extension to 3 3/4" (95 mm);
Use with 2 3/8" (60 mm) backset latch

TL014

Backset extension to 5" (127 mm);
Use with 2 3/4" (70 mm) backset latch



FH001

Passage latch: 2 3/8" (60 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

FH003

Passage latch: 2 3/4" (70 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

FH010

Privacy latch: 2 3/8" (60 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

FH002

Privacy latch: 2 3/4" (70 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



FH005

Deadlatch: 2 3/8" (60 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

FH004

Deadlatch: 2 3/4" (70 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

