



BHMA
CERTIFIED

G2

UL
LISTED
C US

3H

ADA

10
YEAR

- Type** • Cylindrical lock
- Certifications**
 - Certified ANSI/BHMA A156.2, Series 4000, Grade 2
 - cULus listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - Meets ADA requirements
 - 10 Year limited warranty
- Door Thickness** • 1³/₈ – 1³/₄" (35 – 44.5 mm)
- Handing** • Non handed
- Backset**
 - 2³/₄" (70 mm)
 - 2³/₈" (60 mm) – available
 - 3³/₄" (95 mm) – available
 - 5" (127 mm) – available
- Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw
- Faceplate**
 - Mortise type, square corners
 - 1¹/₈ x 2¹/₄" (28.5 x 57 mm)
- Strike** • ASA Strike
- Trim**
 - Solid, pressure cast lever
 - Brass rose
 - Rose diameter: 3⁵/₁₆" (84.5 mm)

- Chassis**
 - Concealed mounting plate and screws
 - Removable security posts
 - Lever clutch release – option

- Preparation**
 - Cross bore: 2¹/₈" (54 mm)
 - Edge bore: 1" (25.4 mm)

- Cylinder**
 - Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable

Other keyways and keying options available, including CX5 high security

Functions	10 Passage	53 Entry
	15 Exit	60 Store
	17 Dummy, single	70 Classroom
	42 Privacy	80 Storeroom
	51 Office	82 Institution

Lever Styles S–Straight; no return

Finish C26D–Satin chrome

Other finishes available by special order

F	S	53	C26D	-O
SERIES	STYLE	FUNCTION	FINISH	OPTION ¹


(1) OPTIONS: 238 2-3/8IN (60MM) BACKSET -O LEVER CLUTCH RELEASE (53 & 80 ONLY)

SELECTION GUIDE

SERIES	STYLE	FUNCTION ¹	FINISH ¹	/ CASE
F	S	10 Passage	C26D	12
F	S	15 Exit	C26D	12
F	S	17 Dummy, single	C26D	40
F	S	42 Privacy	C26D	12
F	S	51 Office ↔	C26D	12
F	S	53 Entry ↔	C26D	12
F	S	60 Store ↔	C26D	12
F	S	70 Classroom ↔	C26D	12
F	S	80 Storeroom ↔	C26D	12
F	S	82 Institution / utility ↔	C26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

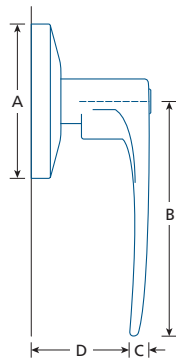

		A	B	C	D*
FS	Ⓢ	3 ⁵ / ₁₆ (84.5)	4 ¹¹ / ₁₆ (119)	⁹ / ₁₆ (14)	1 ²⁷ / ₃₂ (46.8)

IN (MM) (*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106

T-Strike, adjustable tab; square corners:
1 ¹/₈ x 2 ³/₄" (28.5x70 mm)

9106NH

T-Strike, no hole; square corners:
1 ¹/₈ x 2 ³/₄" (28.5x70 mm)



ASA-T

ASA strike with adjustable tab

ASANH

ASA strike, no hole



TL013

Backset extension to 3 ³/₄" (95 mm);
Use with 2 ³/₈" (60 mm) backset latch

TL014

Backset extension to 5" (127 mm);
Use with 2 ³/₄" (70 mm) backset latch



FH001

Passage latch: 2 ³/₈" (60 mm) backset,
1 ¹/₈ x 2 ¹/₄" (28.5x57 mm) faceplate

FH003

Passage latch: 2 ³/₄" (70 mm) backset,
1 ¹/₈ x 2 ¹/₄" (28.5x57 mm) faceplate

FH010

Privacy latch: 2 ³/₈" (60 mm) backset,
1 ¹/₈ x 2 ¹/₄" (28.5x57 mm) faceplate

FH002

Privacy latch: 2 ³/₄" (70 mm) backset,
1 ¹/₈ x 2 ¹/₄" (28.5x57 mm) faceplate



FH005

Deadlatch: 2 ³/₈" (60 mm) backset,
1 ¹/₈ x 2 ¹/₄" (28.5x57 mm) faceplate

FH004

Deadlatch: 2 ³/₄" (70 mm) backset,
1 ¹/₈ x 2 ¹/₄" (28.5x57 mm) faceplate

