



- Type

• Cylindrical lock
- Certifications

- Conforms to ANSHI/BHMA A156.2, Series 4000, Grade 2
  - cULus listed, 3hr fire-rating
  - UL 10C Positive Pressure Rating
  - Meets ADA requirements
  - 1 Year limited warranty
- Door Thickness

- 1<sup>3</sup>/<sub>8</sub> – 1<sup>3</sup>/<sub>4</sub>" (35 – 45 mm)
  - Indicator model: 1<sup>3</sup>/<sub>4</sub>" (45 mm)
- Handing

• Non handed
- Backset

- 2<sup>3</sup>/<sub>4</sub>" (70 mm)
  - 2<sup>3</sup>/<sub>8</sub>" (60 mm) – available
- Spring Latch

• Stainless steel, 1/2" (12.7 mm) throw
- Faceplate

- Mortise type, square corners
  - 1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm)
- Strike

• ASA Strike
- Trim

- Solid, pressure cast heavy duty lever
  - Brass rose
  - Rose diameter: 3<sup>3</sup>/<sub>8</sub>" (85.7 mm)
- Chassis

- Concealed mounting plate and screws
  - Removable security posts
- Preparation

- Cross bore: 2<sup>1</sup>/<sub>8</sub>" (54 mm)
  - Edge bore: 1" (25.4 mm)
- Cylinder

- Solid brass, 6-pin
  - Schlage "C" keyway, 2 keys
  - Removable, rekeyable

*Other keyways and keying options available, including CX5 high security.*
- Functions

10 Passage	53 Entry
17 Dummy, single	53I Entry w/ indicator
42 Privacy	70 Classroom
42I Privacy w/ indicator	80 Storeroom
- Lever Styles

H–Standard return
- Finish

26D–Satin chrome

RW	H	53	–	C26D	238
SERIES	STYLE	FUNCTION		FINISH	OPTION¹

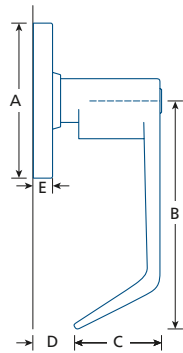
(1) OPTION: 238 2-3/8IN (60MM) BACKSET



# SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>		FINISH	/ CASE
RW	H	10	Passage	26D	10
RW	H	17	Dummy, single	26D	20
RW	H	42	Privacy	26D	10
RW	H	42I	Privacy, with indicator	26D	10
RW	H	53	Entry ➡	26D	10
RW	H	53I	Entry, with indicator ➡	26D	10
RW	H	70	Classroom ➡	26D	10
RW	H	80	Storeroom ➡	26D	10

(1) OTHER FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.

➡ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.



		A	B	C	D	E
RW		3 <sup>3</sup> / <sub>8</sub> (85.7)	4 <sup>3</sup> / <sub>4</sub> (120)	2 <sup>1</sup> / <sub>8</sub> (54)	7 <sup>1</sup> / <sub>16</sub> * (11)	3 <sup>3</sup> / <sub>8</sub> (9.5)
RW Indicator		3 <sup>3</sup> / <sub>8</sub> (85.7)	4 <sup>3</sup> / <sub>4</sub> (120)	2 <sup>1</sup> / <sub>8</sub> (54)	7 <sup>1</sup> / <sub>16</sub> (11)	9 <sup>1</sup> / <sub>16</sub> (14.3)

IN (MM) (\*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**  
T-Strike, square corners:  
1<sup>1</sup>/<sub>8</sub>x2<sup>3</sup>/<sub>4</sub>" (28.5x70 mm)



**ASA**  
ASA strike



**CWAL-01**  
Passage latch: 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**CWAL-05**  
Deadlatch: 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate

