



- Type** • Cylindrical lock
- Certifications** • Conforms to ANSI/BHMA A156.2, Series 4000, Grade 1
• cULus listed, 3hr fire-rating
• UL 10C Positive Pressure Rating
• 10 Year limited warranty
- Door Thickness** • $1\frac{3}{8}$ –2" (35–51 mm)
• SFIC models: $1\frac{9}{16}$ –2" (40–51 mm)
- Handing** • Non handed
- Backset** • $2\frac{3}{4}$ " (70 mm)
• $2\frac{3}{8}$ " (60 mm) – available
• $3\frac{3}{4}$ " (95 mm) – available
• 5" (127 mm) – available
- Spring Latch** • Stainless steel, $\frac{1}{2}$ " (12.7 mm) throw
• Deadlatch, $\frac{3}{4}$ " (19 mm) throw – available
- Faceplate** • Mortise type, square corners
• $1\frac{1}{8}$ x $2\frac{1}{4}$ " (28.5x57 mm)
- Strike** • ASA Strike
- Trim** • Stainless steel knob
• Stainless steel rose
• Rose diameter: $2\frac{15}{16}$ " (74.6 mm)
- Chassis** • Concealed mounting plate and screws
• Removable security posts
- Preparation** • Cross bore: $2\frac{1}{8}$ " (54 mm)
• Edge bore: 1" (25.4 mm)
- Cylinder** • Solid brass, 6-pin
• Schlage "C" keyway, 2 keys
• Removable, rekeyable
• Small format interchangeable core (SFIC) model – available*
- Other keyways and keying options available, including CX5 high security. (*) BEST® and CX5® cores sold separately.*
- Functions**
- | | | | |
|----|---------|----|-----------|
| 10 | Passage | 70 | Classroom |
| 42 | Privacy | 80 | Storeroom |
| 53 | Entry | | |
| 60 | Store | | |
- Finish** C32D–Stainless steel
- Other finishes available by special order*


GX1B	53	C32D
SERIES	FUNCTION	FINISH

SELECTION GUIDE

SERIES	FUNCTION ¹	FINISH ¹	/CASE
GX1B	10 Passage	C32D	6
GX1B	42 Privacy	C32D	6
GX1B	53 Entry ➡	C32D	6
GX1B	53IC Entry SFIC, less core ➡	C32D	6
GX1B	60 Store ➡	C32D	6
GX1B	60IC Store SFIC, less core ➡	C32D	6
GX1B	70 Classroom ➡	C32D	6
GX1B	70IC Classroom SFIC, less core ➡	C32D	6
GX1B	80 Storeroom ➡	C32D	6
GX1B	80IC Storeroom SFIC, less core ➡	C32D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

➡ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

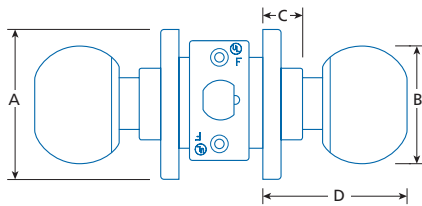

	A	B	C	D*
GX1B 	2 ¹⁵ / ₁₆ (74.6)	2 ¹ / ₄ (57)	1 ³ / ₁₆ (21)	2 ⁵ / ₈ -3 (67-76)

IN (MM)

(*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106

T-Strike, square corners:
1¹/₈ x 2³/₄ " (28.5 x 70 mm)

9106NH

T-Strike, no hole; square corners:
1¹/₈ x 2³/₄ " (28.5 x 70 mm)



ASA-T

ASA strike with adjustable tab

ASANH

ASA strike, no hole



9807

CX5 high security SFIC core, 7 pin, 0 bitted

CX5-TPICB

GX1B tailpiece for use with CX5 SFIC cores

CBI-BF6KD-26D

BEST® F type SFIC core, 6 pin, keyed different

CBI-BF7KD-26D

BEST® F type SFIC core, 7 pin, keyed different



GX1SL238

Passage latch: 2³/₈ " (60 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate

GX1SL234

Passage latch: 2³/₄ " (70 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate

GX1PL238

Privacy latch: 2³/₈ " (60 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate

GX1PL234

Privacy latch: 2³/₄ " (70 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate



GX1DL238

Deadlatch: 2³/₈ " (60) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate

GX1DL234

Deadlatch: 2³/₄ " (70 mm) backset
1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate



GX1DL234-34

Deadlatch: 2³/₄ " (70 mm) backset, 3⁴/₄ " (19 mm) throw, 1¹/₈ x 2¹/₄ " (28.5 x 57 mm) faceplate
For use in double door or electric strike applications



GX1LE334

Backset extension to 3³/₄ " (95 mm); use with 2³/₈ " (60 mm) backset latch

GX1LE500

Backset extension to 5 " (127 mm); use with 2³/₄ " (70 mm) backset latch

