



- Type** • Cylindrical lock
 - Certifications**
 - Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2
 - cULus listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - 5 Year limited warranty
 - Door Thickness** • 1³/₈–1³/₄" (35–44.5 mm)
 - Handing** • Non handed
 - Backset**
 - 2³/₄" (70 mm)
 - 2³/₈" (60 mm) – available
 - 3³/₄" (95 mm) – available
 - 5" (127 mm) – available
 - Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw
 - Faceplate**
 - Mortise type, square corners
 - 1¹/₈x2¹/₄" (28.5x57 mm)
 - 2³/₈" (60 mm) backset: 1x2¹/₄" (25.4x57mm)
 - Strike** • ASA Strike
 - Trim**
 - Brass or stainless steel knob*
 - Brass or stainless steel rose*
 - Rose diameter: 3" (76 mm)
- (*) Material dependant on finish.

- Chassis** • Concealed mounting plate and screws

- Preparation**
 - Cross bore: 2¹/₈" (54 mm)
 - Edge bore: 1" (25.4 mm)

- Cylinder**
 - Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable

Other keyways and keying options available, including CX5 high security

Functions	10 Passage	60 Store
	15 Exit	70 Classroom
	17 Dummy, single	79 Institution exit
	32 Patio	80 Storeroom*
	42 Privacy	82 Institution/utility
	53 Entry*	94 Hotel/motel

(*) Available without core cylinder (LC)

- Finish** C3–Polished brass, C32D–Stainless steel

Other finishes available by special order

TL	53	B	C32D	238
SERIES	FUNCTION	STYLE	FINISH	OPTION ¹


(1) OPTION: 238 2-3/8IN (60MM) BACKSET LC–LESS CORE (53 & 80)

SELECTION GUIDE

SERIES	FUNCTION ¹	STYLE	FINISH ¹	/ CASE
TL	10 Passage	B	C3, C32D	20
TL	15 Exit	B	C3, C32D	20
TL	17 Dummy, single	B	C3, C32D	40
TL	32 Patio (includes full-lip D-Strike)	B	C32D	20
TL	42 Privacy	B	C3, C32D	20
TL	53 Entry ↔	B	C3, C32D	20
TL	53 LC Entry, housing only (less core) ↔	B	C32D	20
TL	60 Store ↔	B	C32D	20
TL	70 Classroom ↔	B	C3, C32D	20
TL	79 Institution / exit ↔	B	C32D	20
TL	80 Storeroom ↔	B	C3, C32D	20
TL	80 LC Storeroom, housing only (less core) ↔	B	C32D	20
TL	82 Institution / utility ↔	B	C32D	20
TL	94 Hotel ↔	B	C32D	20

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

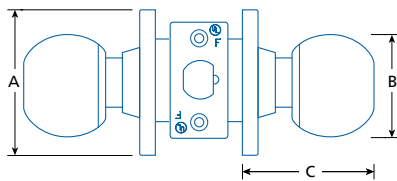

	A	B	C
TL B	3 (76)	2 $\frac{1}{8}$ (57)	2 $\frac{5}{8}$ (67)

IN (MM)

PARTS & ACCESSORIES



9102
Full lip D-Strike, adjustable tab; square corners:
1 $\frac{3}{4}$ x2 $\frac{1}{4}$ " (44.5x57 mm)



9106
T-Strike, square corners:
1 $\frac{1}{8}$ x2 $\frac{3}{4}$ " (28.5x70 mm)



9106NH
T-Strike, no hole; square corners:
1 $\frac{1}{8}$ x2 $\frac{3}{4}$ " (28.5x70 mm)




ASA-T
ASA strike, adjustable tab; square corners



ASANH
ASA strike, no hole; square corners



TL020
Plastic spacer for latches with 1 x 2 $\frac{1}{4}$ "
(25.4x57 mm) faceplate to fit preparations
for 1 $\frac{1}{8}$ x2 $\frac{3}{4}$ " (28.5x57 mm) faceplates



TL013
Backset extension to 3 $\frac{3}{4}$ " (95 mm);
Use with 2 $\frac{3}{8}$ " (60 mm) backset latch



TL014
Backset extension to 5" (127 mm);
Use with 2 $\frac{3}{4}$ " (70 mm) backset latch Use with
2 $\frac{3}{4}$ " (70 mm) backset latch



TL001
Passage latch: 2 $\frac{3}{8}$ " (60 mm) backset,
1x2 $\frac{1}{4}$ " (25.4x57 mm) faceplate



TL003
Passage latch: 2 $\frac{3}{4}$ " (70 mm) backset,
1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm) faceplate




TL010
Privacy latch: 2 $\frac{3}{8}$ " (60 mm) backset,
1x2 $\frac{1}{4}$ " (25.4x57 mm) faceplate



TL002
Privacy latch: 2 $\frac{3}{4}$ " (70 mm) backset,
1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm) faceplate



TL005
Deadlatch 2 $\frac{3}{8}$ " (60 mm) backset
1x2 $\frac{1}{4}$ " (25.4x57 mm) faceplate



TL004
Deadlatch: 2 $\frac{3}{4}$ " (70 mm) backset,
1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm) faceplate

TL006
Deadlatch: 5" (127 mm) backset,
1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm) faceplate

TL011 (for function 32 or 94)
Deadlatch: 2 $\frac{3}{8}$ " (60 mm) backset,
1x2 $\frac{1}{4}$ " (25.4x57 mm) faceplate

TL012 (for function 32 or 94)
Deadlatch: 2 $\frac{3}{4}$ " (70 mm) backset,
1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm) faceplate

