


# HANDLES & PADDLES

## SECURITY HARDWARE

### DOREX LEVER HANDLE



RIGHT HAND (RH)  
HANDLE SHOWN

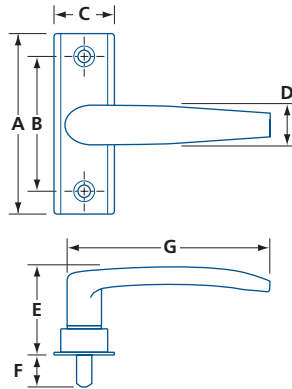

- Lever handle with cam for DL2000 series deadlatch, to be used on 1<sup>3</sup>/<sub>4</sub>" (44 mm) thick aluminum doors
- Left hand or right hand, field reversible
- Sturdy and dependable aluminum alloy construction
- Hardened steel spindle and cam
- 3" (76 mm) center to center mounting holes
- Cam (#0112PLUGLH / RH) included but also sold separately

#0112RH for Right Hand Reverse (RHR) or right hand (RH) doors

#0112LH for Left Hand Reverse (LHR) or left hand (LH) doors


For LH handle in Left Hand Reversed use #0112PLUGRH

For RH handle in Right Hand Reversed use #0112PLUGLH

MODEL	HAND	FINISH	A	B	C	D	E	F	G	/CASE
0112	LH, RH	C20D, C28	4 (101.5)	3 (76.0)	1 <sup>11</sup> / <sub>32</sub> (34.0)	<sup>7</sup> / <sub>8</sub> (22.4)	1 <sup>15</sup> / <sub>16</sub> (48.8)	2 <sup>3</sup> / <sub>32</sub> (18.0)	3 <sup>3</sup> / <sub>4</sub> (95.1)	50

IN (MM) LH: LEFT HAND, RH: RIGHT HAND

### DOREX PUSH/PULL PADDLE

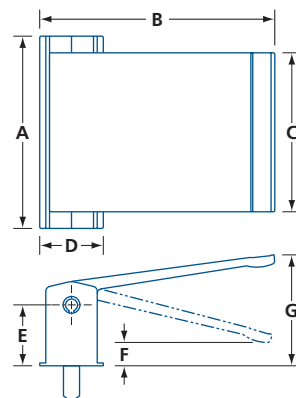

- PUSH / PULL paddle with cam for DL2000 series deadlatch
- Left hand or right hand, field reversible
- Zinc alloy base
- Extruded and anodized aluminum paddle
- 3" (76.2 mm) center to center concealed mounting holes
- Spring (#5590S) and extension kit (#5590SPK) for 2<sup>1</sup>/<sub>4</sub>" (57.2 mm) door thickness are available
- Cam (0112PLUGLH / RH) included but also sold separately

#5590\*R for Right Hand Reverse (RHR) or right hand (RH) outswing doors

#5590\*L for Left Hand Reverse (LHR) or left hand (LH) outswing doors

For LH handle in Left Hand Reversed use #0112PLUGRH

For RH handle in Right Hand Reversed use #0112PLUGLH

MODEL	FINISH	HAND	A	B	C	D	E	F	G	/CASE
5590	C20D, C28	L, R	4 <sup>1</sup> / <sub>32</sub> (102.8)	4 <sup>15</sup> / <sub>16</sub> (125.7)	3 <sup>11</sup> / <sub>32</sub> (85.0)	1 <sup>11</sup> / <sub>32</sub> (34.0)	1 <sup>5</sup> / <sub>16</sub> (33.0)	<sup>9</sup> / <sub>16</sub> (14.0)	2 <sup>3</sup> / <sub>8</sub> (60.0)	20

IN (MM) L: LEFT HAND, R: RIGHT HAND