



**BHMA**  
CERTIFIED

**G2**

**UL**  
LISTED

**3H**




**ADA**


**10**  
YEAR


- Type** • Cylindrical lock
- Certifications**
- Certified ANSI/BHMA A156.2, Series 4000, Grade 2
  - cULus listed, 3hr fire-rating
  - UL 10C Positive Pressure Rating
  - Meets ADA requirements
  - 10 Year limited warranty
- Door Thickness** • 1<sup>3</sup>/<sub>8</sub> – 1<sup>3</sup>/<sub>4</sub>" (35 – 44.5 mm)
- Handing** • Non handed
- Backset**
- 2<sup>3</sup>/<sub>4</sub>" (70 mm)
  - 2<sup>3</sup>/<sub>8</sub>" (60 mm) – available
  - 3<sup>3</sup>/<sub>4</sub>" (95 mm) – available
  - 5" (127 mm) – available
- Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw
- Faceplate**
- Mortise type, square corners
  - 1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm)
- Strike** • ASA Strike
- Trim**
- Solid, pressure cast lever
  - Brass rose
  - Rose diameter: 3<sup>5</sup>/<sub>16</sub>" (84.5 mm)
- Chassis**
- Concealed mounting plate and screws
  - Removable security posts
- Preparation**
- Cross bore: 2<sup>1</sup>/<sub>8</sub>" (54 mm)
  - Edge bore: 1" (25.4 mm)
- Cylinder**
- Solid brass, 6-pin
  - Schlage "C" keyway, 2 keys
  - Removable, rekeyable
- Other keyways and keying options available, including CX5 high security*
- Functions**
- |                  |              |
|------------------|--------------|
| 10 Passage       | 53 Entry     |
| 17 Dummy, single | 70 Classroom |
| 42 Privacy       | 80 Storeroom |
- Lever Styles** L–Linear; no return
- Finish** C19–Matte black; C26D–Satin chrome
- Other finishes available by special order*


F	L	53	C26D
SERIES	STYLE	FUNCTION	FINISH

## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/ CASE
F	L	10 Passage	C19, C26D	12
F	L	17 Dummy, single	C19, C26D	40
F	L	42 Privacy	C19, C26D	12
F	L	53 Entry 	C19, C26D	12
F	L	70 Classroom 	C19, C26D	12
F	L	80 Storeroom 	C19, C26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

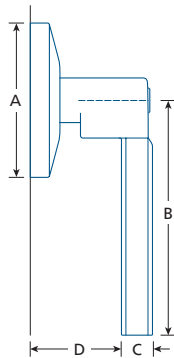

	A	B	C	D*
<b>FL</b> 	3 <sup>5</sup> / <sub>16</sub> (84.5)	4 <sup>11</sup> / <sub>16</sub> (119)	<sup>3</sup> / <sub>4</sub> (19)	1 <sup>27</sup> / <sub>32</sub> (46.8)
IN (MM)	(*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.			

## PARTS & ACCESSORIES



**9106**  
T-Strike, adjustable tab; square corners:  
1 <sup>1</sup>/<sub>8</sub> x 2 <sup>3</sup>/<sub>4</sub>" (28.5x70 mm)

**9106NH**  
T-Strike, no hole; square corners:  
1 <sup>1</sup>/<sub>8</sub> x 2 <sup>3</sup>/<sub>4</sub>" (28.5x70 mm)



**ASA-T**  
ASA strike with adjustable tab

**ASANH**  
ASA strike, no hole



**TL013**  
Backset extension to 3 <sup>3</sup>/<sub>4</sub>" (95 mm);  
Use with 2 <sup>3</sup>/<sub>8</sub>" (60 mm) backset latch

**TL014**  
Backset extension to 5" (127 mm);  
Use with 2 <sup>3</sup>/<sub>4</sub>" (70 mm) backset latch



**FH001**  
Passage latch: 2 <sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1 <sup>1</sup>/<sub>8</sub> x 2 <sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**FH003**  
Passage latch: 2 <sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1 <sup>1</sup>/<sub>8</sub> x 2 <sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**FH010**  
Privacy latch: 2 <sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1 <sup>1</sup>/<sub>8</sub> x 2 <sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**FH002**  
Privacy latch: 2 <sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1 <sup>1</sup>/<sub>8</sub> x 2 <sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**FH005**  
Deadlatch: 2 <sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1 <sup>1</sup>/<sub>8</sub> x 2 <sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**FH004**  
Deadlatch: 2 <sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1 <sup>1</sup>/<sub>8</sub> x 2 <sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate

